
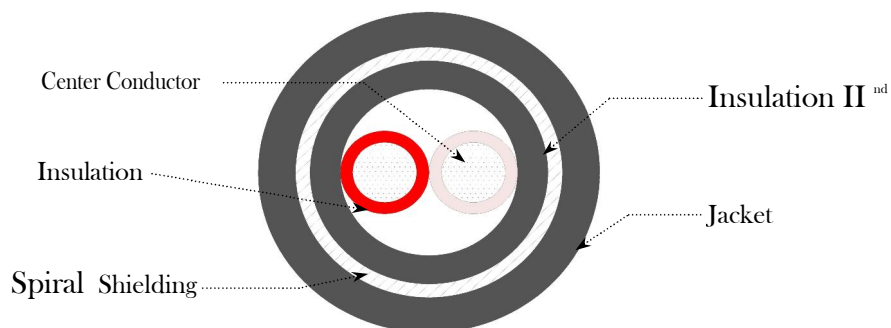


24 AWG 2 CORE DIGITAL MICROPHONE CABLE

CONSTRUCTION	
Center Conductor	: 24 AWG, 26/0.102 mm Annealed Tinned Copper.
Insulation	: PE
Core Colour	: Red , White
Insulation II nd	: PVC
Colour	: Milky White
Spiral Shielding	: 100 % 96 x 42 (SWG) ATC
Outer Jacket	: Soft PVC
Outer Jacket Colour	: Black / As Per Customer
DIAMETERS	
Center Conductor	: 26/0.102 ± 0.003 mm
Insulation	: 1.15 ± 0.05 mm
Insulation II nd	: 3.0 ± 0.10 mm
Outer Jacket Diameter	: 6.00 ± 0.10 mm
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 90.31 Ω-km
Temperature	: -15° to 70°Celsius
Insulation Resistance (Min.) At 20°C	: 5000 M Ω-km

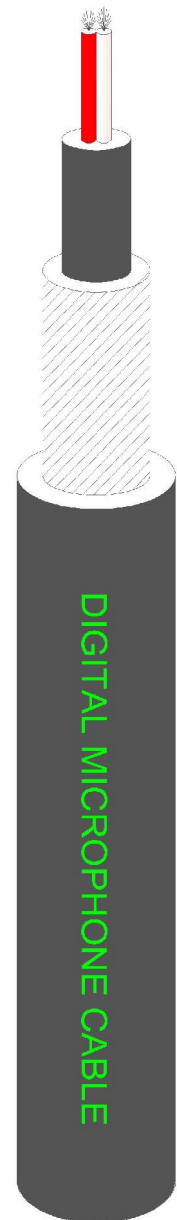

ISSUE	Prepared By	Approved By
No. 01.		