


16/38 ATC (23 AWG) 2/CORE LAPP MICROPHONE CABLE

CONSTRUCTION	
Center Conductor	: 23 AWG, 16/0.152 mm Annealed Tinned Copper.
Insulation	: PE
Core Colour	: Red, Blue
Filler	: Cotton Threads
Spiral Shield	: 100 % 96 x 42 (SWG) ATC
Outer Jacket	: Soft PVC L/F
Outer Jacket Colour	: As Per Customer with Nurling
DIAMETERS	
Center Conductor	: 16/0.152 ± 0.003 mm
Insulation	: 1.50 ± 0.05 mm
Outer Jacket Diameter	: 6.00 ± 0.20 mm
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 69.40 Ω-km
Temperature	: -15° to 70°Celsius
Insulation Resistance (Min.) At 20°C	: 5000 M Ω-km

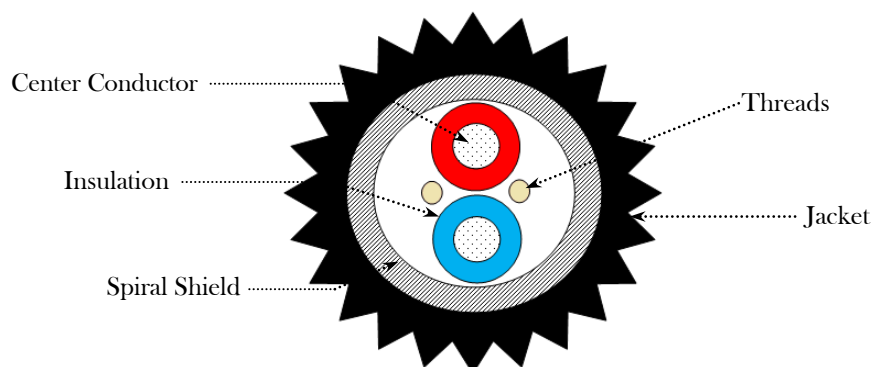

Issue No. 01.
Date : 09.02.2022

Prepared By :
Rahul

Approved By :
Lalan Kumar